

Product Description

Use high-performance COB LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Adjustable Down Light LED
Model No.	IBSP102
Wattage	10W 15W 24W 30W 40W 50W
Luminous Flux	> 900lm 1350lm 2160lm 2700lm 3600lm 4500lm
Beam	15° 24° 38° 60°
IP Ratings	IP20
Material	Die casting aluminum heatsink
Finish	White black

Installation

Suitable for 5~18 mm thick ceiling board


LEDs

Brand	Bridgelux Cree
Type	COB
Color Temp	2700K 3000K 3500K 4000K 5000K 5700K 6000K 6500K
CRI	80 90

Control Gear

Remote constant current LED driver	
Brand	Eaglerise Lifud Osram Tridonic
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics

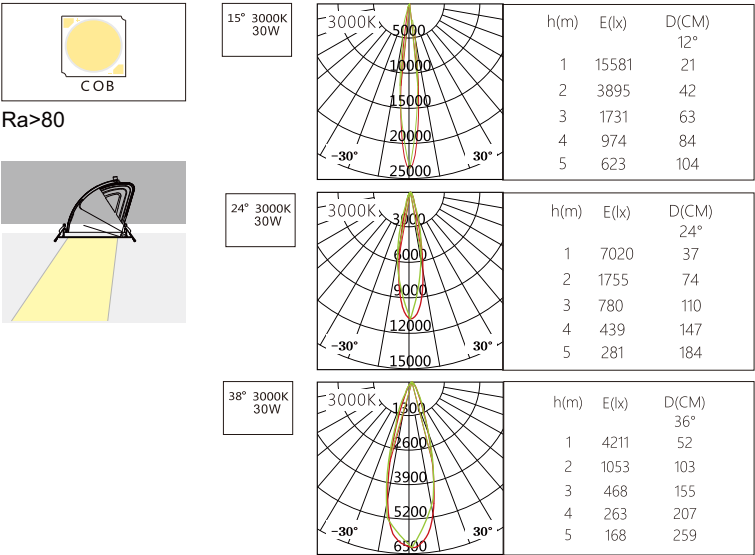

Picture

