

Job/Project _____
 Location _____
 Fixture Ref. _____
 Quantity _____
 Remarks _____

Product Description

Use high-performance COB LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure Adjustable Down Light LED
 Model No. IBSP122
 Wattage 10W | 20W | 30W | 2×10W | 2×20W | 2×30W | 3×10W | 3×20W | 3×30W
 Luminous Flux > 800lm | 1600lm | 2800lm | 1600lm | 3800lm | 6000lm
 2600lm | 5600lm | 8200lm
 Beam 15° | 24° | 38°
 IP Ratings IP20
 Material Die casting aluminum heatsink
 Finish White | black

Installation

Suitable for 5~18 mm thick ceiling board


LEDs

Brand Bridgelux | Cree | Osram
 Type COB
 Color Temp 2700K | 3000K | 3500K | 4000K
 5000K | 5700K | 6000K | 6500K
 CRI 80 | 90

Control Gear

Remote constant current LED driver
 Brand Eaglerise | Lifud | Boke
 Input Voltage 220~240Vac | 100-277Vac
 Dimming Non Dim | Dim
 Remarks Flicker-free, PF 0.5 | 0.9

Photometrics

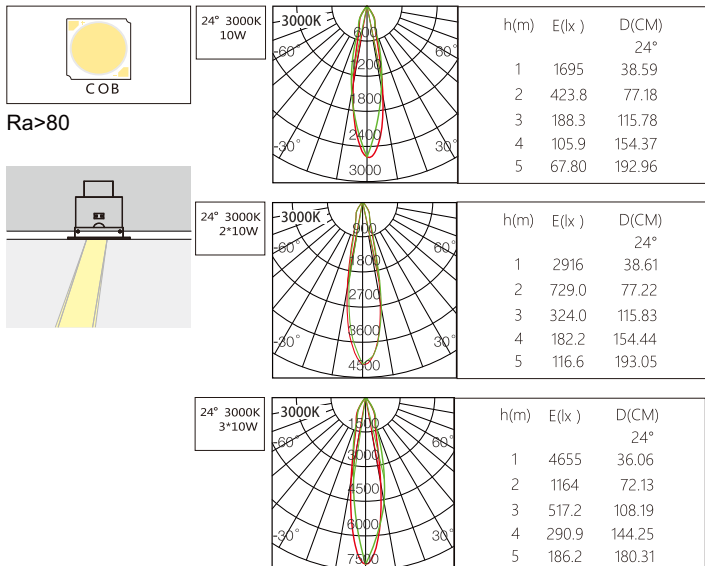

Picture

