

Product Description

Use high-performance SMD LED, Ra>80, Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Fixed Down Light LED
Model No.	IBDL125
Wattage	18W 28W 38W 48W
Luminous Flux	>100lm/W
Beam	60°
IP Ratings	IP65
Material	Die-casting alu.trim and heatsink, glass. lens
Finish	Matt white or black trim

Installation

Suitable for 5~18 mm thick ceiling board

LEDs

Brand	Osram Sanan
Type	SMD 3030
Color Temp	2700K 3000K 3500K 4000K 5000K 5700K 6500K
CRI	80


Control Gear

Remote constant current LED driver	
Brand	Lifud Eaglerise OEM
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics



Ra>80




55° 28W 3000K		<table><tr><th>h(m)</th><th>E(lx)</th><th>D(cm)</th></tr><tr><td>1</td><td>1315</td><td>111.52</td></tr><tr><td>2</td><td>328.8</td><td>223.04</td></tr><tr><td>3</td><td>146.1</td><td>334.56</td></tr><tr><td>4</td><td>82.20</td><td>446.08</td></tr><tr><td>5</td><td>52.61</td><td>557.60</td></tr></table>	h(m)	E(lx)	D(cm)	1	1315	111.52	2	328.8	223.04	3	146.1	334.56	4	82.20	446.08	5	52.61	557.60
h(m)	E(lx)	D(cm)																		
1	1315	111.52																		
2	328.8	223.04																		
3	146.1	334.56																		
4	82.20	446.08																		
5	52.61	557.60																		

Job/Project _____
Location _____
Fixture Ref. _____
Quantity _____
Remarks _____

Picture



Line art

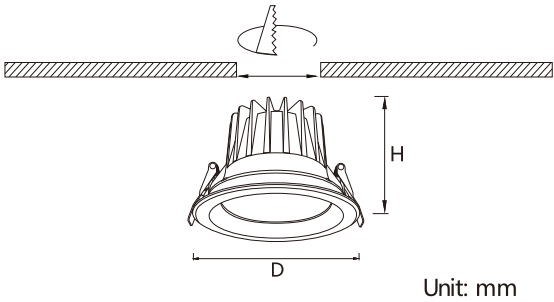

Model	Watts	D x H(mm)	Cutout(mm)
IBDL125CT115	18W	Ø134 × H97mm	Ø115mm
IBDL125CT140	28W	Ø160 × H110mm	Ø140mm
IBDL125CT170	38W	Ø188 × H129mm	Ø170mm
IBDL125CT200	48W	Ø227 × H129mm	Ø200mm
IBDL125CT220	48W	Ø250 × H149mm	Ø220mm