

Product Description

Use high-performance COB LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Adjustable Down Light
Model No.	LED IBSP150
Wattage	8W 10W 15W 25W
Luminous Flux	720lm 900lm 1350lm 2250lm
Beam	15° 24° 38° 45° 60°
IP Ratings	IP65
Material	Die-casting alu. trim and heatsink, PMMA. lens
Finish	Matt white or black trim

Installation

Suitable for 5~18 mm thick ceiling board


LEDs

Brand	Bridgelux Cree
Type	COB
Color Temp	2700K 3000K 3500K 4000K 5000K 5700K 6500K
CRI	80 90


Control Gear

Remote constant current LED driver	
Brand	Lifud Eaglerise Tridonic
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics



Ra>80



Job/Project

Location

Fixture Ref.


Quantity

Remarks

Picture



Line art

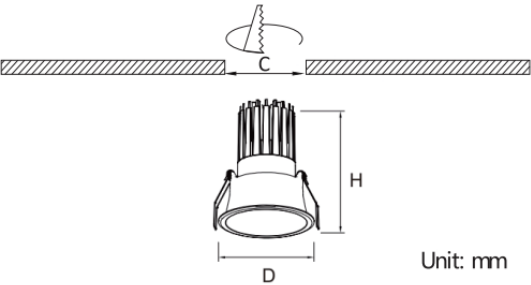

Unit: mm

Model	Watts	D xH(mm)	Cutout(mm)
IBSP150CT075H86	8W	Ø 85×H86mm	Ø 75mm
IBSP150CT075H90	15W	Ø 85×H90mm	Ø 75mm
IBSP150CT095H86	10W	Ø 105×H86mm	Ø 95mm
IBSP150CT095H107	15W	Ø 105×H107mm	Ø 95mm
IBSP150CT095H134	25W	Ø 105×H134mm	Ø 95mm